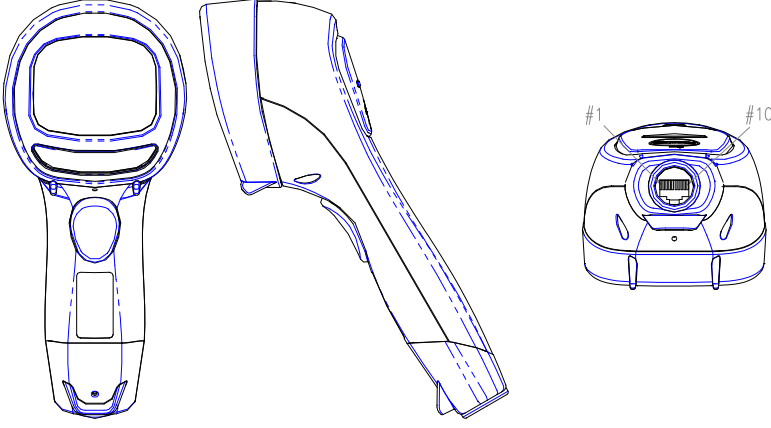


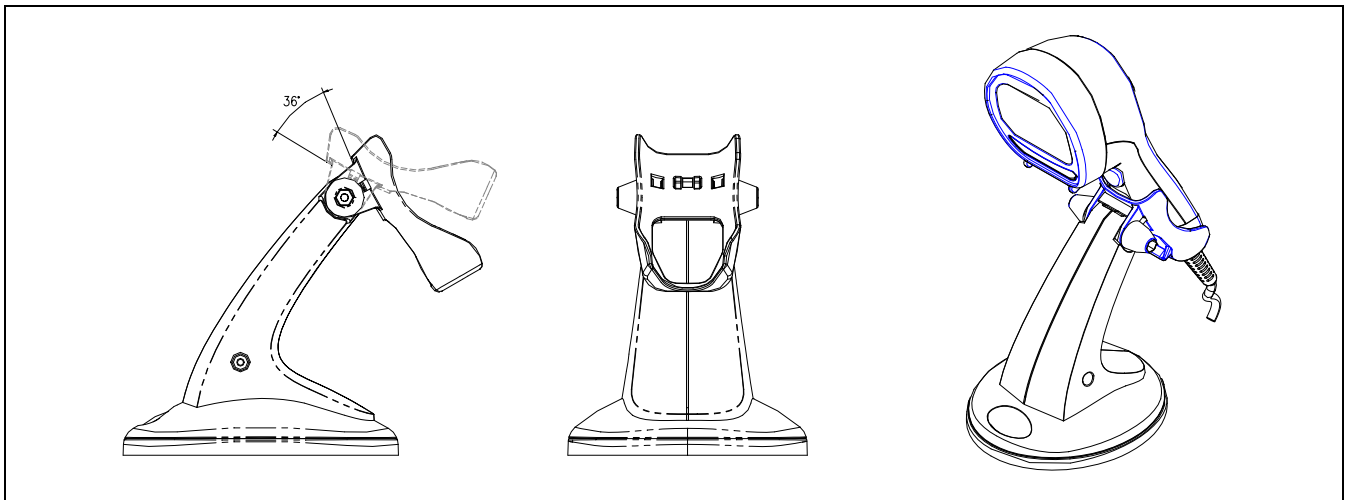
Z-3060





Handheld Omnidirectional Laser Scanner

Standard Device

	PIN-OUT CONFIGURATION			
	RJ 1.	RTS_TTL	RJ 2.	KB Data
	RJ 3.	PC Clock	RJ 4.	GND
	RJ 5.	CTS_TTL	RJ 6.	RX_TTL
	RJ 7.	KB Clock	RJ 8.	+5V
	RJ 9.	PC Data	RJ10.	TX_TTL



















Standard Accessory



Description	Stand for Z-3060	
Barcode	P/N	REMARK
	883-60HL00-000	White Housing
	883-60HL00-001	Black Housing
	883-60HL00-0NB	White Housing w/o ZEBEX logo
	883-60HL00-0N1	Black Housing w/o ZEBEX logo

[Buyer's Guide]

Ordering Information (Stand included for standard package)

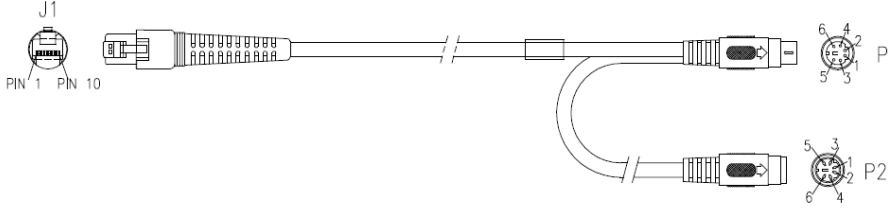

Barcode	P/N	Model Name	Remark
	883-600000-000	Z-3060	White Housing (Device Only w/o Stand)
	883-600000-001	Z-3060 (B)	Black Housing (Device Only w/o Stand)
	883-6000KP-000	Z-3060 (K)	White Housing w/PS/2 Cable
	883-6000KP-001	Z-3060 (K)(B)	Black Housing w/PS/2 Cable
	883-6000R9-000	Z-3060 (R)	White Housing w/RS-232 Cable (DCE pin-out)
	883-6000R9-001	Z-3060 (R)(B)	Black Housing w/RS-232 Cable (DCE pin-out)
	883-6000RP-000	Z-3060 (R)	White Housing w/RS-232 Cable (DTE pin-out)
	883-6000RP-001	Z-3060 (R)(B)	Black Housing w/RS-232 Cable (DTE pin-out)
	883-6000UB-000	Z-3060 (U)	White Housing w/USB Cable
	883-6000UB-001	Z-3060 (U)(B)	Black Housing w/USB Cable
	883-600000-0NB	Z-3060	White Housing w/o Logo (Device Only w/o Stand)
	883-600000-0N1	Z-3060 (B)	Black Housing w/o Logo (Device Only w/o Stand)
	883-6000KP-0NB	Z-3060 (K)	White Housing w/PS/2 Cable w/o Logo
	883-6000KP-0N1	Z-3060 (K)(B)	Black Housing w/PS/2 Cable w/o Logo
	883-6000RP-0NB	Z-3060 (R)	White Housing w/RS-232 Cable (DCE pin-out) w/o Logo
	883-6000RP-0N1	Z-3060 (R)(B)	Black Housing w/RS-232 Cable (DCE pin-out) w/o Logo
	883-6000UB-0NB	Z-3060 (U)	White Housing w/USB Cable w/o Logo
	883-6000UB-0N1	Z-3060 (U)(B)	Black Housing w/USB Cable w/o Logo

[Buyer's Guide]

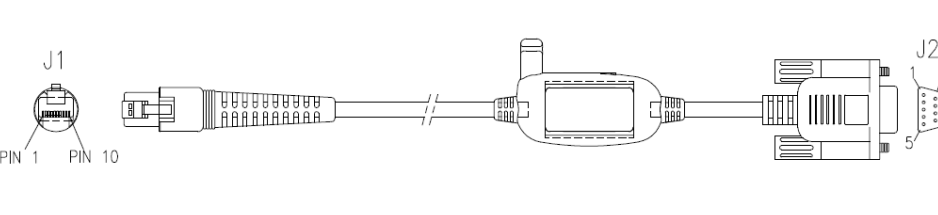

Cable Options

- The standard cable is gray, straight, and 2 meters (6.5 feet) in length.
- The standard cable options include PS/2, RS-232, and USB cable.
- Special Order Requirement:
ZEBEX is capable of supplying special customized cable, given that customers provide detailed pin configurations. The minimum order quantity of a special cable is 250 pcs.

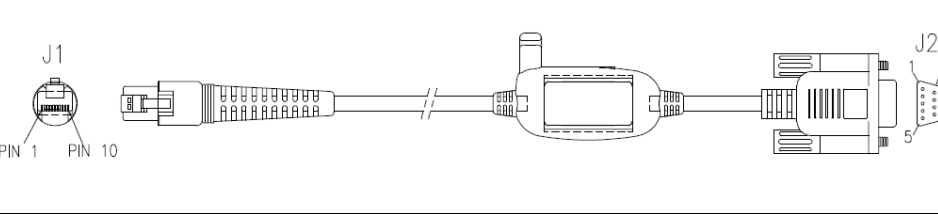

1. Keyboard Wedge Cable (for PS/2)

		PIN-OUT CONFIGURATION	
		MINI DIN (M)	MINI DIN(F)
1.	PC Data	1.	KB Data
2.	N.C.	2.	N.C.
3.	GND	3.	GND
4.	+5V	4.	+5V
5.	PC Clock	5.	KB Clock
6.	N.C.	6.	N.C.
Item Part No.	171-10K102-200		

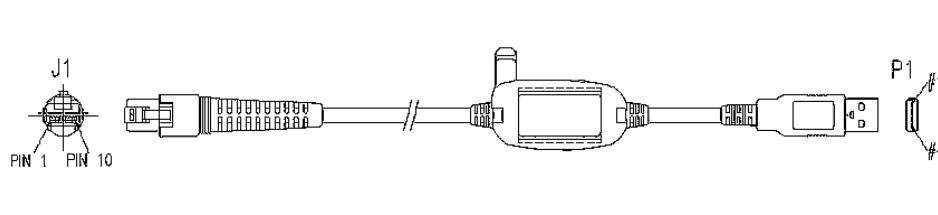



2. RS-232C Communication Cable (DTE pin out)

		PIN-OUT CONFIGURATION	
		DB-9 (F)	FUNCTION
2	TX		
3	RX		
7	CTS		
8	RTS		
5	GND		
9	+5V Input		
Item Part No.	171-10R442-200		

RS-232C Communication Cable (DCE pin out) (non-standard option)

		PIN-OUT CONFIGURATION	
		DB-9 (F)	FUNCTION
2	RX		
3	TX		
7	RTS		
8	CTS		
5	GND		
9	+5V Input		
Item Part No.	171-10R432-200		

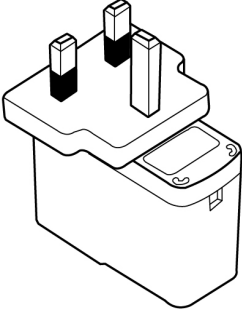
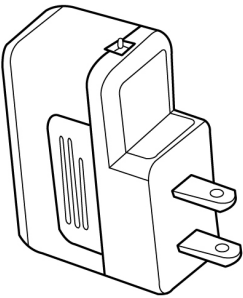
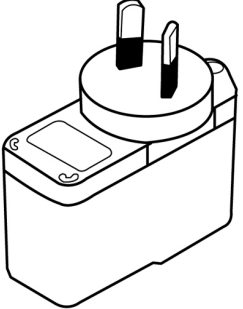
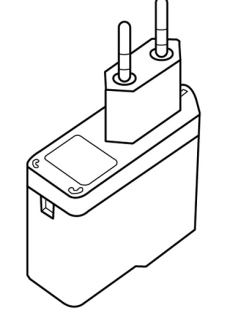
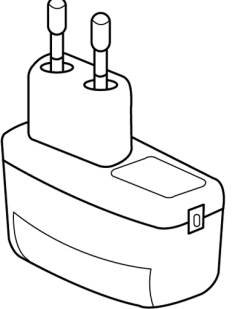
3. USB Interface

		PIN-OUT CONFIGURATION	
		USB TYPE A CONNECTOR	FUNCTION
1.	VCC		
2.	D-		
3.	D+		
4.	VSS		
HID USB only (non-standard option)	Item Part No.	171-10U305-200	
Virtual COM USB (non-standard option)	Item Part No.	171-10U300-200	
HID / OPOS USB	Item Part No.	171-10U322-200	

- * HID USB, virtual COM USB and OPOS USB interface are of the same pin-out but different part number.
- * Additional software and special firmware may be required for activating virtual COM or OPOS USB interface.

Power Adapter

Z-3060 requires a minimum of 200mA at 5 VDC power and consumes power from the host machine. If the host can not supply sufficient power, ZEBEX provides adapters of the following plug types:

UK Plug	US Plug	Australian Plug	European Plug	Korean Plug
				

* The figures are for reference only. The adaptor form factor is subject to change without prior notice.