




# [ Buyer's Guide ]

## Z-6070 Dual-laser Omnidirectional Scanner


### Standard Device

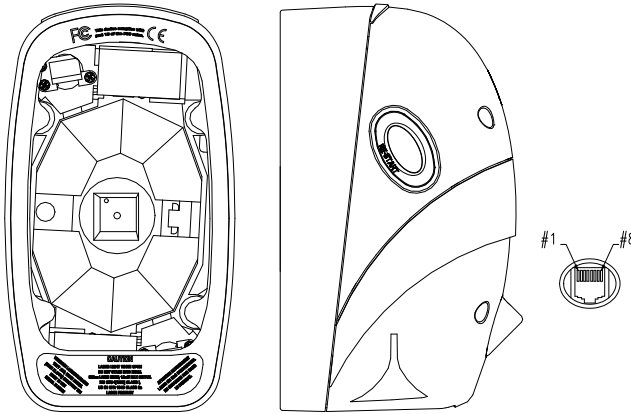



PIN-OUT CONFIGURATION		
PIN	FUNCTION	
	KEYBOARD	RS-232C
1	DC + 5V input	
2	Keyboard Clock	N.C.
3	PC Clock	RTS_TTL
4	Ground	
5	N.C.	TXD_TTL
6	N.C.	RXD_TTL
7	Keyboard Data	N.C.
8	PC Data	CTS_TTL

Barcode	P/N	Model Name	Remark
	886-70BD00-000	Z-6070	White housing w/o stand w/o cable
	886-70BD00-001	Z-6070 (B)	Black housing w/o stand w/o cable
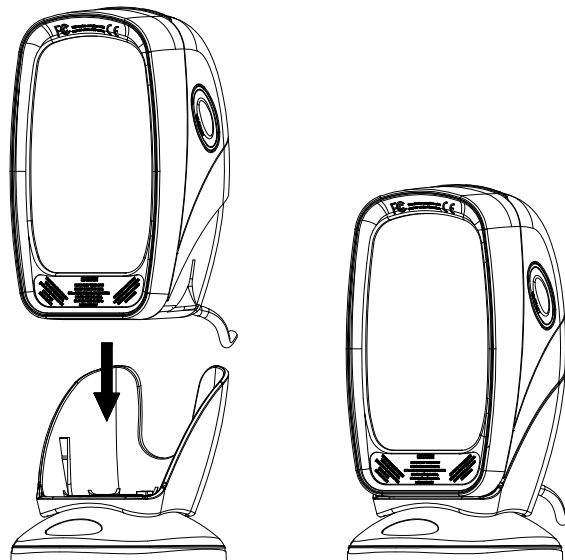
### Standard Accessory – Universal Stand



















Barcode	P/N	Model Name	Remark
	886-70HL00-000	US-6070	White color
	886-70HL00-001	US-6070 (B)	Black color

# [ Buyer's Guide ]

## Ordering Information

(Universal stand included for standard package)

Barcode	P/N	Model Name	Remark
	886-700000-000	Z-6070	White housing w/o cable
	886-700000-001	Z-6070 (B)	Black housing w/o cable
	886-7000KP-000	Z-6070 (K)	White housing w/PS/2 cable
	886-7000KP-001	Z-6070 (K) (B)	Black housing w/PS/2 cable
	886-7000RP-000	Z-6070 (R)	White housing w/RS-232 cable (DTE Pin-out)
	886-7000RP-001	Z-6070 (R) (B)	Black housing w/RS-232 cable (DTE Pin-out)
	886-7000UB-000	Z-6070 (U)	White housing w/USB Cable
	886-7000UB-001	Z-6070 (U) (B)	Black housing w/USB Cable
	886-700000-0NB	Z-6070	White housing w/o cable w/o ZEBEX logo
	886-700000-0N1	Z-6070 (B)	Black housing w/o cable w/o ZEBEX logo
	886-7000KP-0NB	Z-6070 (K)	White housing w/PS/2 cable w/o ZEBEX logo
	886-7000KP-0N1	Z-6070 (K) (B)	Black housing w/PS/2 cable w/o ZEBEX logo
	886-7000RP-0NB	Z-6070 (R)	White housing w/RS-232 cable (DTE Pin-out) w/o ZEBEX logo
	886-7000RP-0N1	Z-6070 (R) (B)	Black housing w/RS-232 cable (DTE Pin-out) w/o ZEBEX logo
	886-7000UB-0NB	Z-6070 (U)	White housing w/USB Cable w/o ZEBEX logo
	886-7000UB-0N1	Z-6070 (U) (B)	Black housing w/USB Cable w/o ZEBEX logo

# [ Buyer's Guide ]

## Standard Cable Options

- The standard cable is gray, straight, and 2 meters (6.5 feet) in length.
- The standard cable options include PS/2, RS-232, and USB cable.
- Special Order Requirement:  
ZEBEX is capable of supplying special customized cable, given that customers provide detailed pin configurations. The minimum order quantity of a special cable is 250 pcs.

### 1. Keyboard Wedge Cable (for PS/2)

		PIN-OUT CONFIGURATION			
		5DIN (M)		MINI DIN(F)	
		DIN	FUNCTION	DIN	FUNCTION
Item Part No.	171-42K102-200	1.	PC Data	1.	KB Data
		2.	N.C.	2.	N.C.
		3.	GND	3.	GND
		4.	+5V	4.	+5V
		5.	PC Clock	5.	KB Clock
		6.	N.C.	6.	N.C.

### 2. RS-232 Cable

		DTE PINOUT	
		DB-9 (F)	FUNCTION
Item Part No.	171-42R442-200	2	TX
		3	RX
		7	CTS
		8	RTS
		5	GND
		9	+5 V


### 3.USB Cable

		USB TYPE A CONNECTOR	
		FUNCTION	
		1.	VCC
		2.	D-
		3.	D+
4.	VSS		
HID USB / OPOS USB	Item Part No.	171-40U322-200	

\* Additional software or special firmware may be necessary for activating virtual COM or OPOS USB interface.

## **Power Adapter**

Z-6070 requires a minimum of 270mA at 5 VDC power and consumes power from the host machine. If the host can not supply sufficient power, ZEBEX provides adapters of the following plug types:

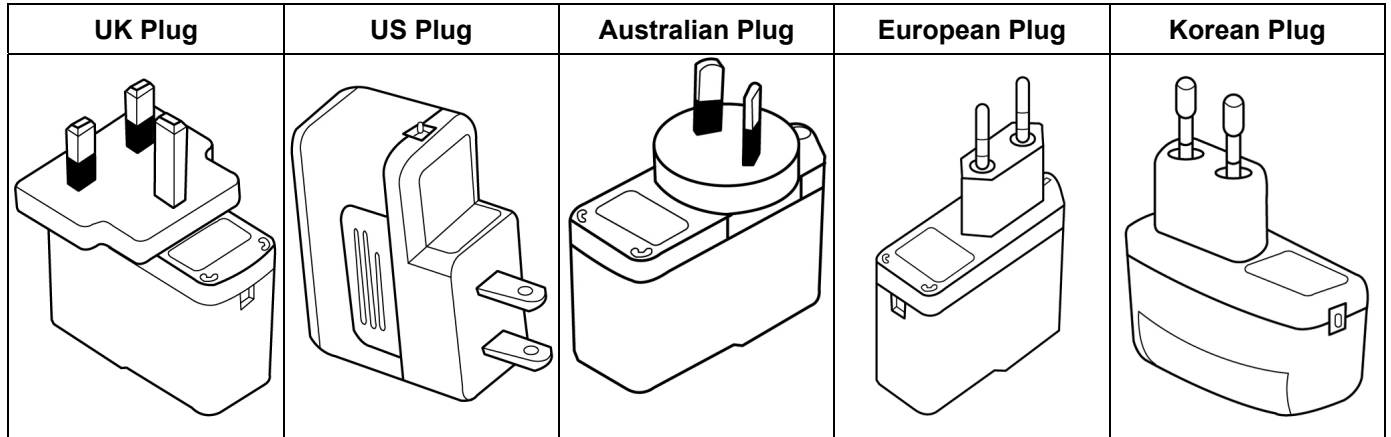

\* The figures are for reference only. The adaptor form factor is subject to change without prior notice.